

# EOSPRINT 2


## Intuitive. Open. Productive.

Benefit from our new generation  
of job and process management software



# EOS software for industrial 3D printing fully integrated in your production workflow

**EOSPRINT 2** is an intuitive, open and productive CAM tool that allows CAD data to be optimized for EOS systems. The EOS ParameterEditor module is part of **EOSPRINT 2** and offers developers a large and open tool set, containing unique exposure strategies and up to 258 parameters. This wide range of parameters offers greater freedom for application-specific optimization.

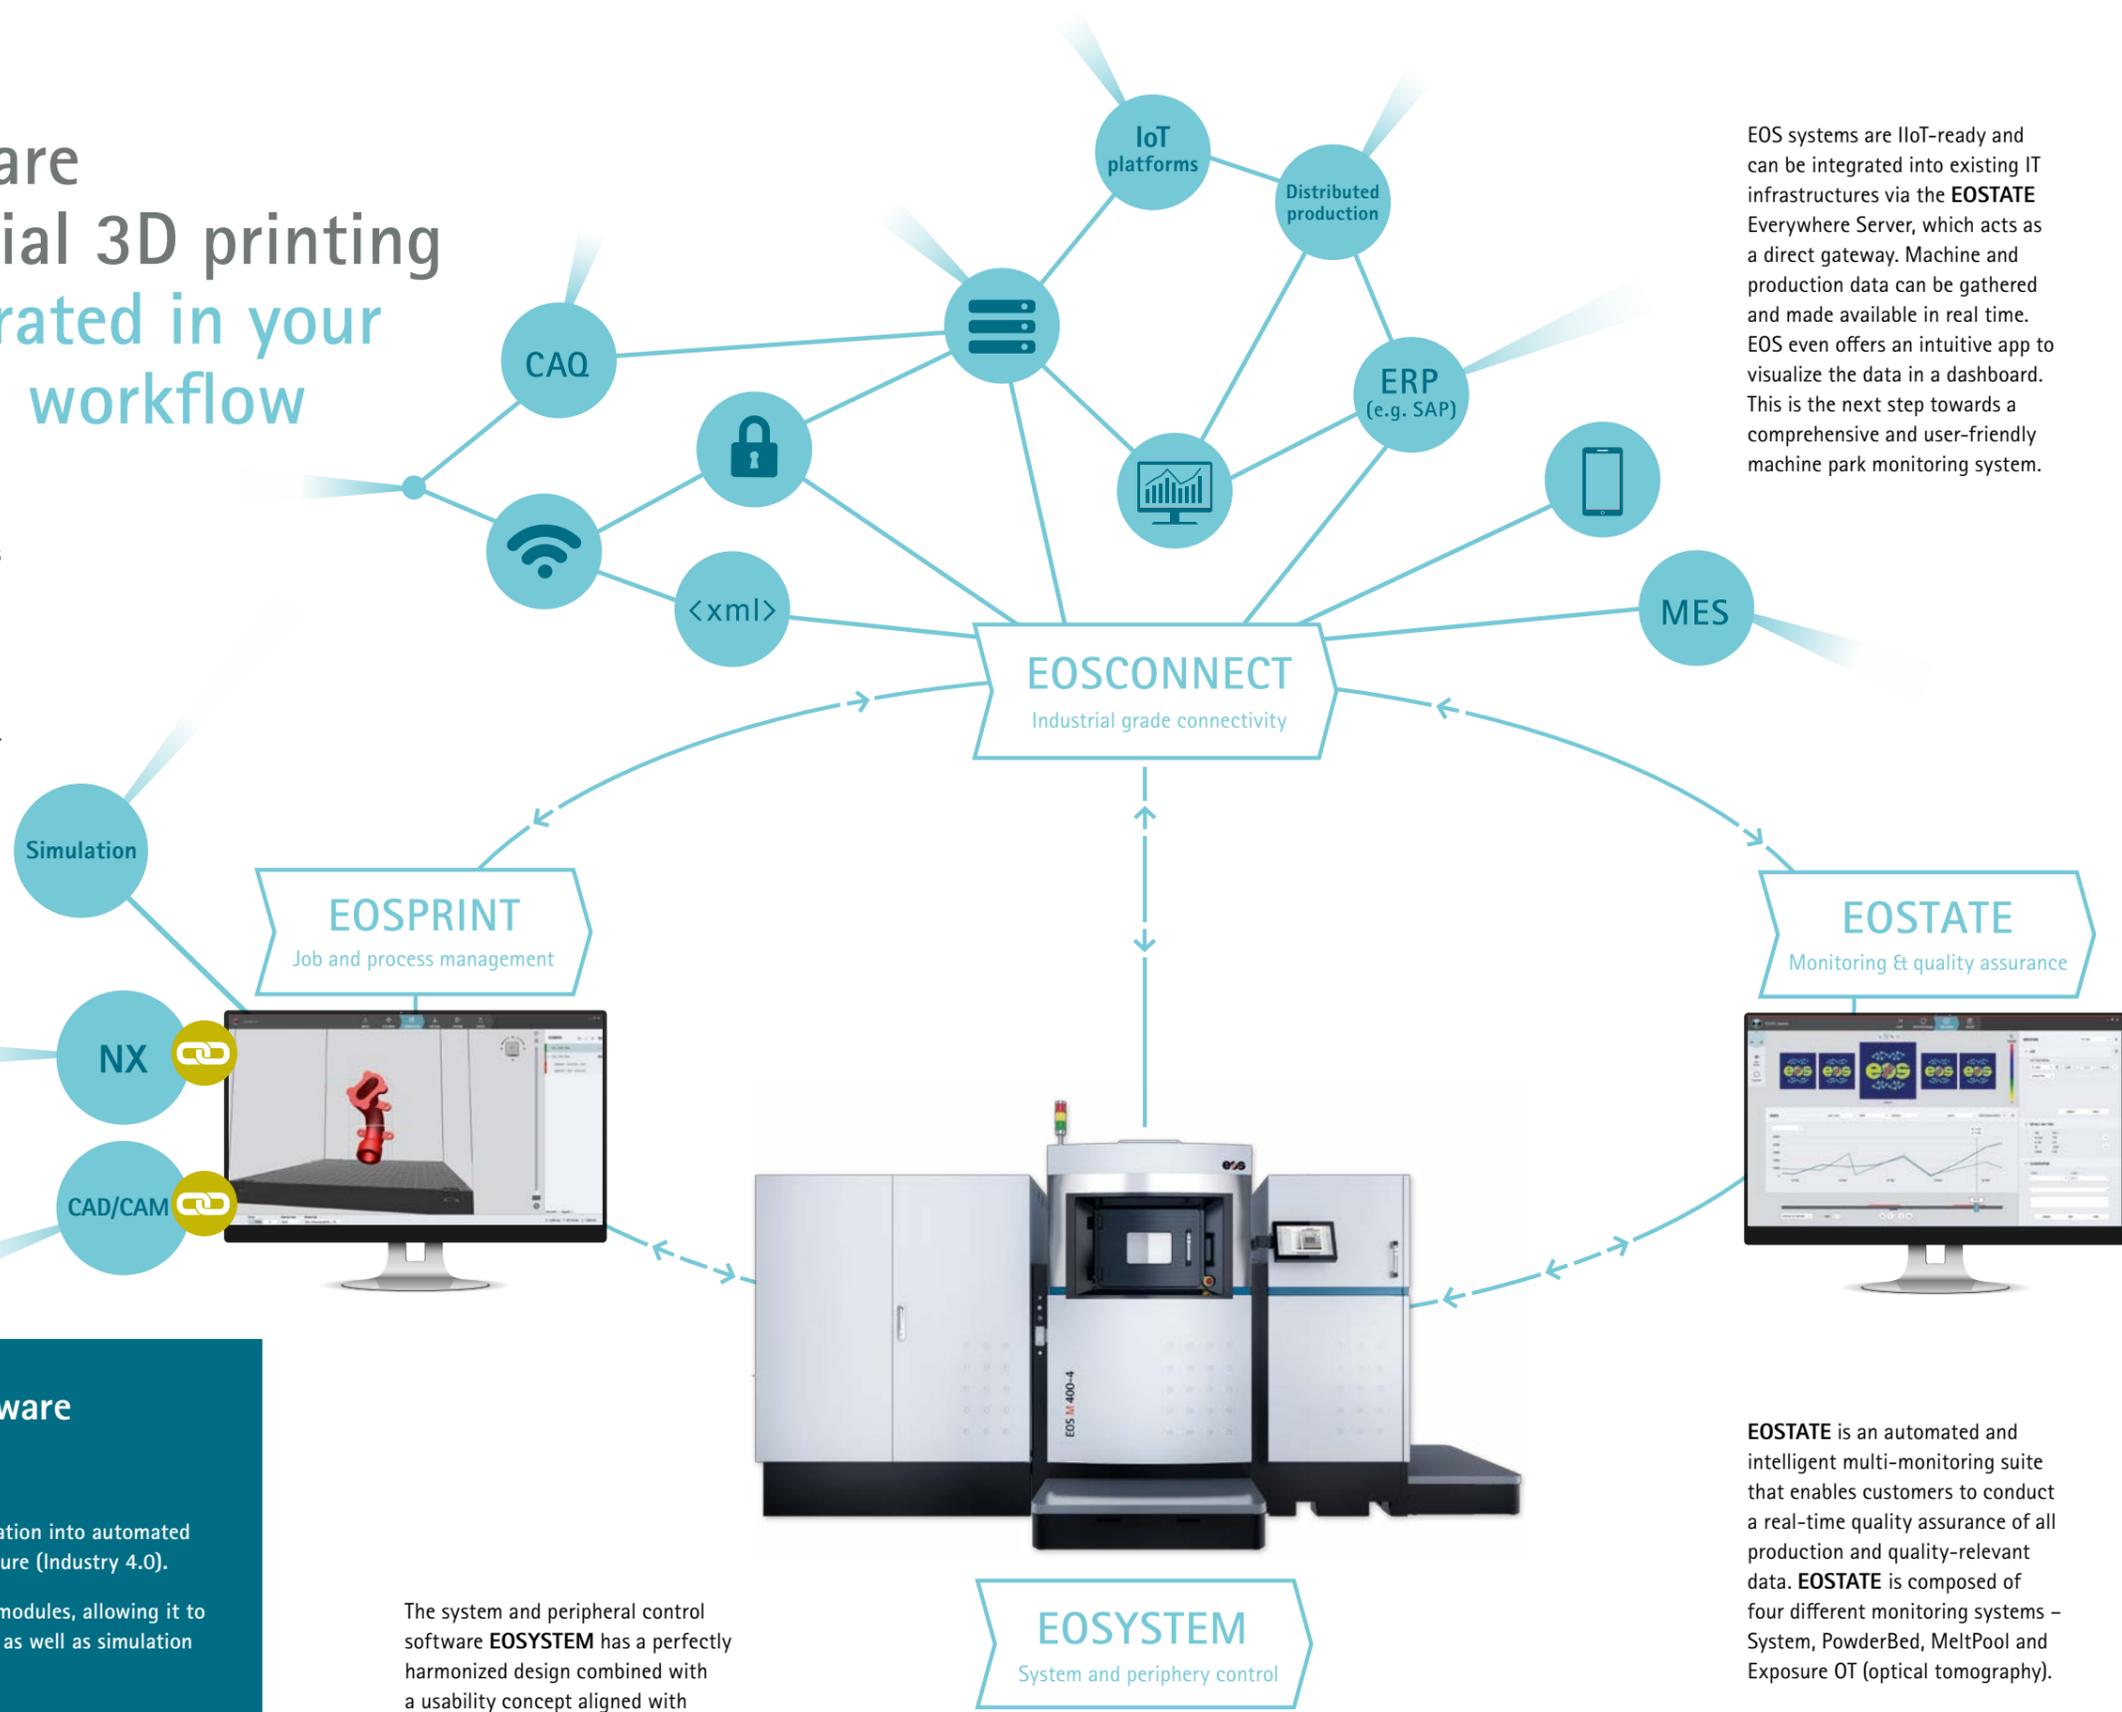

EOS systems are IIoT-ready and can be integrated into existing IT infrastructures via the **EOSTATE** Everywhere Server, which acts as a direct gateway. Machine and production data can be gathered and made available in real time. EOS even offers an intuitive app to visualize the data in a dashboard. This is the next step towards a comprehensive and user-friendly machine park monitoring system.

**Integrable into software environments**

EOSPRINT 2 is ready for full integration into automated workflows as part of the digital future (Industry 4.0).

Its functionality is structured into modules, allowing it to be easily integrated into CAD/CAM as well as simulation environments.

The first partner to adopt our integrated solution is Siemens NX®. Followed by Autodesk® with Netfabb®, Dassault Systèmes® with CATIA™ and Materialise.

[https://www.eos.info/systems\\_solutions/software](https://www.eos.info/systems_solutions/software)

The system and peripheral control software **EOSYSTEM** has a perfectly harmonized design combined with a usability concept aligned with user requirements. The operator can quickly navigate through the menu with the easy-to-use touch display.

**EOSTATE** is an automated and intelligent multi-monitoring suite that enables customers to conduct a real-time quality assurance of all production and quality-relevant data. **EOSTATE** is composed of four different monitoring systems – System, PowderBed, MeltPool and Exposure OT (optical tomography).

# "Reduce data preparation time by 50 percent with EOSPRINT 2."

Benedikt Schlund, Project Leader, toolcraft

## EOSPRINT a CAM tool that fully leverages the potential of industrial 3D printing

EOSPRINT 2 is a game changer in terms of ease of use, and pushes the boundaries of industrial 3D printing. It is an intuitive, open and productive CAM tool that allows CAD data to be optimized for EOS systems.


When used together with data preparation software like Magics or Siemens NX, it offers a comprehensive AM CAM environment designed for engineers who want to fully leverage the benefits of additive manufacturing with production-ready design.

EOSPRINT makes the initial steps of the AM build process easier.

### Benefits:

- Intuitive workflow
- Open process parameters
- Increased productivity
- Excellent EOS quality
- Integrable into software environments

Further information on our software portfolio is available at: [www.eos.info/systems\\_solutions/software](http://www.eos.info/systems_solutions/software)

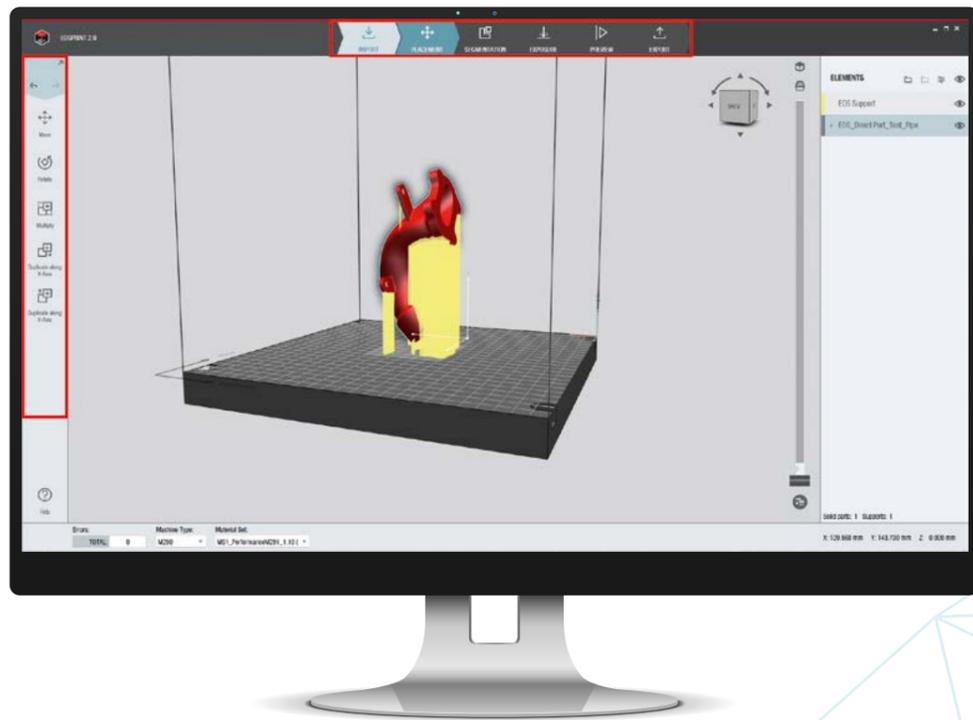

"The new user interface is much clearer and intuitive following the additive manufacturing workflow."

Samuel Blower, Development Engineer,  
Materials Solutions Ltd.

## Intuitive workflow


What differentiates ordinary software from excellent software? Great software is intuitive and quick to learn! EOSPRINT 2 introduces a workflow-based approach that reflects the metal AM CAM process. The behavior of its tools and features is context-sensitive, and changes to adapt to each step in the workflow - enhancing the daily work of engineers. With EOSPRINT 2's integrated slicing functionality (RP Tools), users need fewer tools for the data preparation workflow.

### Benefits:

- Quick to learn
- Easy handling
- More fun to work with
- Fewer errors

"With the openness and clarity of the parameter editor everybody gets the possibility to develop an own process."

Axel Helm, Development Engineer, AM Metals

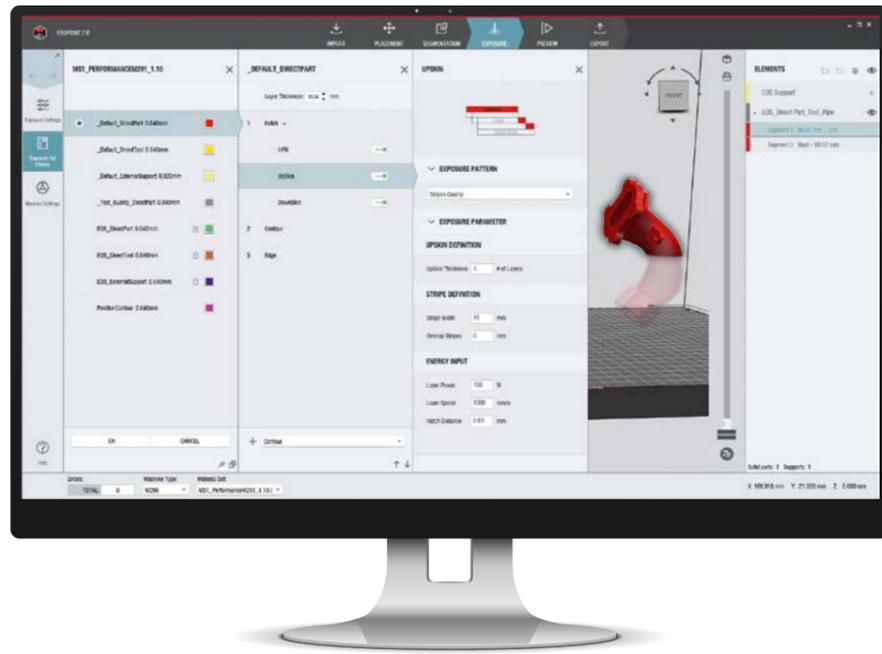

# Open process parameters 3D printing software for experts

Experienced materials and process developers will benefit from the open EOS ParameterEditor module of EOSPRINT: Its intuitive handling shortens the learning curve and reduces the potential for error. To allow customers to get ahead of the competition, the ParameterEditor provides even greater freedom and openness to material development, application-specific parameter optimization, and process development on EOS systems. The unique exposure patterns and parameters offered by the ParameterEditor allow the proven EOS quality standards for parts to be met and facilitate more productive metal 3D printing.

In addition to configuring standard parameters like laser power, scan speed, etc., customers can now:

- Customize the order and number of exposure types. For example, a large number of pre- and post-contours can be defined.
- Vary the start and rotating angle for stripe patterns.

Additionally, the ParameterEditor includes both standard and unique exposure patterns. The wide selection of exposure patterns gives users a choice in the quality of their part.

Developers can continue to use the standard EOS exposure patterns for all materials

- Standard 67° rotated stripes pattern\*
- Chess pattern
- Flow optimized pattern\*\* for homogeneously distributed mechanical properties over the build area
- Edges pattern for highest-detail resolution

In addition to the existing EOS exposure pattern portfolio, three new patterns have been developed in order to maximize the benefit for our users and achieve previously unseen quality and productivity.

The **Stripe Quality** pattern\*\* homogenizes the energy input and thus avoids local overheating. This reduces the risk of job crashes, especially for highly demanding applications. When applied to DownSkin areas, it improves the

buildability of down-facing surfaces to levels that have never been achieved before. It even allows cooling channels with 20° down-facing surfaces to be built without support structures\*\*\*\*. This has many advantages: It is now possible to produce parts that require inner channels with high surface quality requirements or large diameters. These kinds of parts are commonly found in nozzles, turbine blades and injection molding tools. This can also reduce post-processing time, support costs and allows lower build heights thanks to optimized part orientation.

**Time Optimized** typically helps to reduce exposure time in the UpSkin and DownSkin areas by more than 20%\*\*\*. This is achieved by reducing laser jump times.


**Bi-directional support exposure** typically reduces the support exposure by more than 20%\*\*\*. This is achieved by reducing laser jump times.

Since the existing EOS process parameters have already been extensively tested, developers can very quickly create unique parameter sets on their own. The EOS ParameterEditor supports customers in developing their own materials and parameter sets.

### Benefits:

- Develop unique materials and parameter sets
- Reduce build time (e. g. by 20%)
- Build previously unbuildable parts

\*patented  
 \*\*patent pending  
 \*\*\* Tested on a reference geometry aerospace stator segment in EOS Nickel Alloy IN625 on EOS M 290 compared to EOSPRINT 1.  
 \*\*\*\* Tested on MS1. The standard parameters given in Stripes Quality exposure pattern were adjusted. The mechanical properties seemed desirable, but further investigations are required.

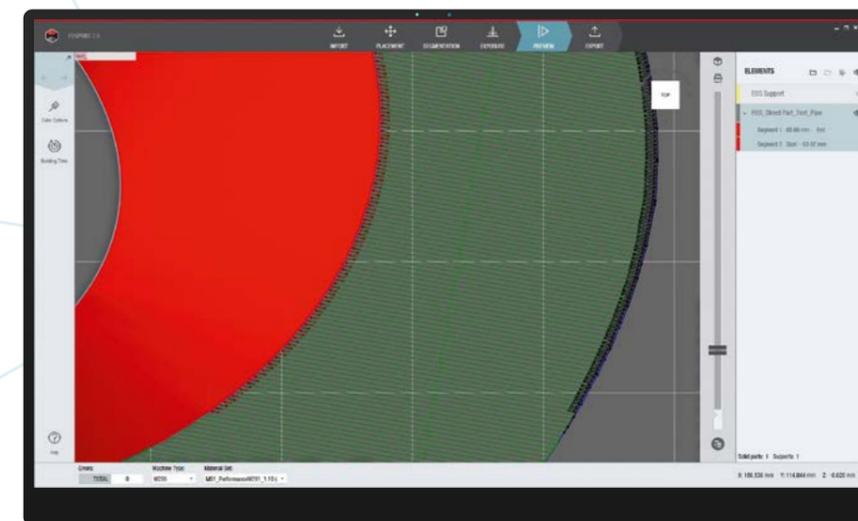

Screenshot visualizing the laser paths for building parts with unique DownSkin surface quality.

Benefit from our experience in parameter development and get in touch for training and consulting. Fasten your learning curve, now.

## Productivity goes up with EOSPRINT 2!

The new plane segmentation functionality allows parts to be more easily optimized for production with respect to quality and productivity. This feature enables the user to split parts by defining a plane that can be shifted in the z-direction in order to create segments with different exposure requirements.

For example, critical areas can be built with 20  $\mu\text{m}$  layer thickness, adapted process parameters and high-quality exposure patterns, whereas uncritical areas can be optimized for productivity e.g. by choosing a layer thickness of 40 or even 80  $\mu\text{m}$ .

### Benefits:

- Increase productivity
- Reduce cost per part
- Achieve adequate quality



"Thanks to plane segmentation and new exposure strategies, we are able to produce faster than ever before and with the required quality. In the future, we will significantly improve our productivity, cost-effectiveness and general feasibility."

Matthias Herker, Application Engineer for Additive Manufacturing, AUDI AG

EOS GmbH  
Electro Optical Systems  
Corporate Headquarters  
Robert-Stirling-Ring 1  
D-82152 Krailling bei München  
Phone +49 89 893 36-0  
Fax +49 89 893 36-285

Further EOS Offices

EOS France  
Phone +33 437 49 76 76

EOS India  
Phone +91 44 39 64 80 00

EOS Italy  
Phone +39 02 33 40 16 59

EOS Korea  
Phone +82 2 6330 5800

EOS Nordic & Baltic  
Phone +46 31 760 46 40

EOS of North America  
Phone +1 248 306 01 43

EOS Singapore  
Phone +65 6430 05 50

EOS Greater China  
Phone +86 21 602307 00

EOS UK  
Phone +44 1926 675 110

[www.eos.info](http://www.eos.info) • [info@eos.info](mailto:info@eos.info)

Think the impossible. You can get it.

